

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
2 December 2004 (02.12.2004)


PCT

(10) International Publication Number  
WO 2004/104362 A1

- (51) International Patent Classification<sup>7</sup>: E21B 10/36, 10/38
- (21) International Application Number: PCT/EP2004/050912
- (22) International Filing Date: 25 May 2004 (25.05.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
03076614.1 26 May 2003 (26.05.2003) EP
- (71) Applicant (for AE, AG, AL, AM, AT, AU, AZ, BA, BB, BE, BG, BR, BW, BY, BZ, CH, CN, CO, CR, CU, CY, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, SZ, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW only): SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V. [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR The Hague (NL).
- (71) Applicant (for CA only): SHELL CANADA LTD [CA/CA]; 400-4th Avenue S.W., Calgary, Alberta T2P 2H5 (CA).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): CRUZ, Antonio Maria Guimaraes Leite [PT/NL]; Volmerlaan 8, NL-2288 GD Rijswijk (NL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: PERCUSSIVE DRILL BIT, DRILLING SYSTEM COMPRISING SUCH A DRILL BIT AND METHOD OF DRILLING A BORE HOLE

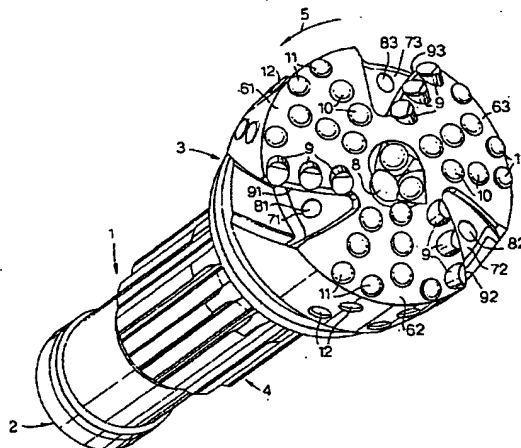

(57) Abstract: A percussive drill bit for drilling into a subterranean earth formation, the drill bit having a central longitudinal axis and being operable by applying axial percussive motion along the axis and rotary motion about the axis, the drill bit comprising: a plurality of blades (61, 62, 63) protruding from the drill bit; a plurality of flow channels (71, 72, 73) stretching along the drill bit in a substantially radial direction whereby the successive flow channels are formed between two adjacent blades; shear cutters (9) which are provided in a row on or close to the leading edge of at least one of said blades with respect to the direction of rotary motion trailing adjacent to the flow channel that is associated with it, for running a fluid through and thereby removing cutting debris accumulating in front of the row of shear cutters; and in addition to these shear cutters; axial cutters (10, 11) which are located, with respect to the direction of rotary motion, in a trailing position with respect to said row of shear cutters and its associated flow channel.

BEST AVAILABLE COPY

WO 2004/104362 A1



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— with international search report

- 1 -

PERCUSSIVE DRILL BIT, DRILLING SYSTEM COMPRISING SUCH A  
DRILL BIT AND METHOD OF DRILLING A BORE HOLE

5 The present invention relates to a percussion drill bit for drilling into a subterranean earth formation, the drill bit having a central longitudinal axis and being operable by applying axial percussive motion along the axis and rotary motion about the axis.

10 The invention further relates to a drilling system for drilling a borehole in an earth formation, comprising a drill string provided with such a percussion drill bit, and to a method of drilling a bore hole into a subterranean earth formation.

The invention also relates to a method of drilling a bore hole into a subterranean earth formation.

15 A percussive shearing drill bit is known and described in US patent 6,253,864. Figure 4 of said US patent depicts a percussive shearing bit having a unitary body, a means for attachment to a drill string, and a plurality of blades housing a plurality of shear cutting elements. Fluid outlets are situated on the head of the unitary body between the blades. The blades consist of a series of receptacles to house the shear cutting elements and a shelf that runs along each blade before the cutting elements. The shelf serves to direct cuttings away from the operative surface of the bit.

20 In operation, the known percussive shearing drill bit is rotated about its longitudinal axis shearing off the rock formation as the drill bit rotates. A hammer simultaneously impacts the bit thereby providing an additional percussive drilling force. The shear cutting elements have been specially designed to withstand the unusual stresses induced by combined percussive/shear

25

30

- 2 -

drilling, in that a distal portion of the shear cutter has been rounded to prevent large localised stresses in the cutters.

5 It is thus a disadvantage of this known percussive shearing drill bit that it requires commodity shear cutting elements. In these commodity shear cutting elements a compromise is found for both shearing and axial cutting. Since the compromise is based on the rounded shape of the distal portion, the compromise is  
10 lost upon wear of the shear cutting elements which forms another disadvantage of this known percussive shearing drill bit.

According to the invention there is provided a percussion drill bit for drilling into a subterranean  
15 earth formation, the drill bit having a central longitudinal axis and being operable by applying axial percussive motion along the axis and rotary motion about the axis, the drill bit comprising:

- a plurality of blades protruding from the drill bit;
- 20 - a plurality of flow channels stretching along the drill bit in a substantially radial direction whereby the successive flow channels are formed between two adjacent blades;
- shear cutters which are provided in a row on or close  
25 to the leading edge of at least one of said blades with respect to the direction of rotary motion trailingly adjacent to the flow channel that is associated with it, for running a fluid through and thereby removing cutting debris accumulating in front of the row of shear cutters;
- 30 and in addition to these shear cutters;
- axial cutters which are located, with respect to the direction of rotary motion, in a trailing position with respect to the row of shear cutters and its associated flow channel.

- 3 -

The drill bit according to the invention comprises axial cutters in addition to the shear cutters. The primary function of the axial cutters is to receive the percussive impacts between the drill bit and the earth formation, whereas the primary function of the shear cutters is to scrape off cutting debris from the bottom of the bore hole.

Since at least part of the axial impacts accompanying the percussive motion is taken by the axial cutting elements, the operational lifetime of the shear cutting elements is further sustained.

The effectiveness of the shear cutters is maintained at the same time, since the axial cutters are provided in a trailing position with respect to the row of shear cutters so that the substantially radial flow channel is fully effective in removing cutting debris accumulating in front of the row of shear cutters. Herewith, so called bit balling, whereby rock flour and rock chips ploughed in front of the shear cutters mix with drilling fluid such as water, oil or mud to form a paste in the bottom of the bore hole is avoided. Bit balling is undesired, since the resulting paste takes the weight of the bit instead of the underlying rock.

As an additional advantage of the invention, the axial cutters can be optimised for axial cutting action, whereas the shearing cutters can independently be optimised for shear cutting without having to take into account axial cutting capability.

The distal portion of the shear cutters can be sharp, and remain sharp for a relatively long operational time, in order to achieve a high shearing effectivity. In particular, the shear cutters can have a higher shearing effectivity than the axial cutters.

In particular, the axial cutters can be more resistant to axial impacts than the shear cutters.

- 4 -

It has also been found that the drill bit according to the invention allows for continued operation even with moderate wear on the cutting elements, without suffering from significant lower drilling rates.

5        It is remarked that in US patent 6,253,864, in Figure 9, a percussion drill bit is disclosed wherein the percussive and shearing components of drilling are accomplished by separate cutters whereby dome-shaped axial cutters are optimised for percussive penetration of the earth formation and shear cutters are optimised for  
10        shear penetration. However, the axial cutters in this known percussion drill bit are disposed ahead of the cutting elements. Consequently, this known percussion drilling bit does not have flow channels directly ahead  
15        of and adjacent to the shear cutters, but it has localised high pressure nozzles and jets directed to the cutters, instead. Without the flow channels ahead of the shear cutters, the cutting debris is insufficiently removed and the axial cutting elements, because of being  
20        disposed ahead of the shear cutters which is there where the cutting debris is pushed to by the shear cutters, even assist in occurrence of undesired bit balling.

      In an advantageous embodiment, the axial cutters are located on the same blade as the shear cutters. Herewith  
25        a robust and stable percussion drill bit is achieved.

      In a particularly advantageous embodiment, the axial cutters are directly followed by the next flow channel, preferably without being separated from the next flow channel by one or more shear cutters. This way, any bit  
30        balling that may start under the axial cutters of the first blade is cleaned away by the subsequent neighbouring flow channel that is associated with the row of shear cutters of the next blade.

      The number of axial cutters in relation to the number  
35        of shear cutters can be optimal in dependence of the type

- 5 -

of earth formation to be drilled. Earth formations containing relatively hard rock, such as granite, can be drilled with relatively fewer shear cutters and greater total number of cutters, thereby distributing the percussive impact over a larger number of axial cutters. A softer formation, such as a lime stone or a sand stone, is best drilled using a bit having relatively many shear cutters because impact forces are lower and the chance of bit balling is higher.

An embodiment wherein there are more axial cutters provided than shearing cutters is preferred for drilling harder earth formations.

The invention also provides a drilling system for drilling a borehole in an earth formation, comprising a drill string provided with a percussion drill bit as described above, the drilling system further comprising:

- first drive means for rotating the drill bit in the borehole so as to induce a scraping movement of the shear cutters along the borehole bottom; and

- second drive means for inducing a longitudinal reciprocal movement of the drill bit in the borehole so as to induce at least the axial cutters to exert a percussive force to the borehole bottom.

In an advantageous embodiment, one or more of the shear cutters is provided with a pre-cut flat impact surface essentially parallel to the plane perpendicular to the longitudinal axis. Even though there are provided axial cutters for taking the axial percussive force, it cannot be avoided that the shear cutters take part of the impact. Due to the pre-cut flat impact surface, the impact stress concentration on the shear cutters is reduced and as a result they do not break as soon as shear cutters that do not have a pre-cut flat impact surface. A natural wear flat has been found not to be

- 6 -

sufficiently flat to effectively reduce the impact stress concentration.

The drill bit or drilling system provided with shear cutters having the pre-cut flat impact surface has been  
5 found to cause fewer stick-slip torsional vibration modes in the drilling system, whereby the bit is hammered to a standstill into the earth formation while the drill string is twisted by the surface rotary drive until it abruptly releases with relatively high rotational speed.  
10 Such a stick-slip torsional vibration repeats periodically and the high rotational speed associated with the stick-slip torsional vibration can severely damage the cutters on the drill bit.

The method of the invention comprises the steps of  
15 providing a drilling system in accordance with one of the above defined embodiments, placing the drill bit against the subterranean earth formation that is to be drilled, exercising a rotary motion about the axis while maintaining a force on the drill bit against the earth  
20 formation in the axial direction, and intermittently providing percussive strikes on the drill bit.

The invention will now be illustrated by way of example, with reference to the accompanying drawing wherein

25 FIG. 1a shows a perspective view of a 6" 3-blade percussion drill bit in accordance with the invention;

FIG. 1b shows a top view of the bit face of the percussion drill bit shown in FIG. 1a;

30 FIG. 2a shows a perspective view of a 6" 4-blade percussion drill bit in another embodiment of the invention;

FIG. 2b shows a top view of the bit face of the percussion drill bit shown in FIG. 2a;



- 7 -

FIG. 3 shows a top view of an 8" bit face according to still another embodiment of the invention, having 8 blades;

5 FIG. 4 shows a schematic cross section of the cutter arrangement; and

FIG. 5 schematically shows different shear cutters having pre-cut flat impact surfaces.

In the figures, like parts carry identical reference numerals.

10 A perspective view of a 3-blade percussion drill bit in accordance with the invention is shown in FIG. 1a. The drill bit comprises a shank 1 stretching longitudinally about a central longitudinal axis of the drill bit, which shank can be especially adapted to fit inside a drill  
15 string. The rearward end of the shank is connected to a striking surface 2 to receive impacts from a percussive hammer, preferably a reciprocative piston hammer (not shown). The forward end of the shank is connected to a drilling head 3. The shank 1 is provided with a plurality  
20 of splines 4, running essentially longitudinally along the shank 1. The splines 4 serve to rotationally couple the drill string and the shank 1, so that the drill bit is operable by applying both axial percussive motion and rotary motion about the central longitudinal axis.

25 Referring now to FIGs 1a and 1b, the drilling head 3 is provided with three blades 61, 62, and 63 that protrude from the drill bit. The areas between the blades 61, 62, 63 are recessed with respect to the blades and thus form flow channels 71, 72, 73. The flow  
30 channels 71, 72, 73, essentially run radially along the drilling head 3.

A central passage way 8 is provided in the drilling head 3 for passing of flushing fluid. In addition of or instead of the central passage way 8, passage ways 81,  
35 82, 83, can be provided in the flow channels 71, 72, 73

- 8 -

between the blades 61, 62, 63. The passage ways are all connected to a central longitudinal bore (not shown) running through the shank 1.

5 In hydro-carbon well drilling operations, the drill string is conventionally rotated in clock-wise direction. Arrows 5 in FIGs. 1a and 1b depict the direction of rotary motion that, in operation, is applied to the drill bit.

10 The blades 61, 62, 63 thus each have a leading edge 91, 92, 93, with respect to the direction of rotary motion 5. Shear cutters 9 are provided in a row on the leading edge 91, 92, 93 of each respective blade 61, 62, 63. Each row of shear cutters 9 has a flow channel associated with it directly in front of the row of shear cutters 9 with respect to the direction of rotary motion 5. The shear cutters 9 have a shape optimised for scraping along the bottom of the bore hole and thereby shearing pieces of the earth formation from the bottom of the bore hole.

15 Behind each row of shear cutters 9, thus in a trailing position with respect each row of shear cutters 9, axial cutters 10, 11, are provided on the blades 61, 62, 63. The axial cutters 10, 11, have a shape optimised for axially indenting the earth formation in the bottom of the bore hole and thereby possibly crushing the earth formation.

20 The outer peripheral sections of the blades 61, 62, 63 can be provided with gauge protectors 12, preferably PDC coated.

25 FIG. 2a shows a perspective view, and FIG. 2b a top view, of a variant of the drill bit of the invention having four blades 6 and consequently four flow channels 7. In other respects, this variant is similar to the one shown in FIGs. 1a and 1b. In particular, the positioning of the rows of shear cutters 9 on the leading

30

35

- 9 -

edges of the blades and the positioning of the axial cutters 10, 11 in a trailing position with respect to the rows of shear cutters 9, are similar to the first discussed embodiment.

5       The diameter of the outer periphery of the percussion drill bits discussed above in FIGs. 1a and 1b, and FIGs. 2a and 2b, is 6", corresponding to approximately 15 cm. An example of an 8" (corresponding to approximately 20 cm outer diameter) bit face is depicted  
10       in FIG. 3. This embodiment is based on eight blades 6 and a corresponding number of flow channels 7. Each flow channel 7 is provided with a passage way 81 for allowing entry of flushing fluid into the respective flow channel. Since this bit face of FIG. 3 has a larger diameter than  
15       the ones shown in FIGs. 1 and 2, a larger number of shear cutters 9 and axial cutters 10,11 can be accommodated.

      In the above described percussion drill bits depicted in FIGs. 2a and 2b and FIG. 3, the shear cutters in a first said row of shear cutters are positioned at  
20       mutually different radial positions than the shear cutters in a second said row of shear cutters on another blade. This way, the gaps left between adjacent shear cutters in one row are covered by the shear cutters in a next row on a different blade when the drill bit is  
25       rotated. Ideally, the circular paths of the collection of shear cutters slightly overlap such that a continuous band of shear cutting is achieved over a majority of the area in the bore hole bottom surface.

      FIG. 4 depicts a schematic representation of the  
30       cutter arrangement, as seen in a tangential cross section. Visible are a blade 6 and its leading edge 91. A shear cutter 9 is provided on or adjacent to the leading edge 91, to shear-cut the earth formation 13 and scrape off cutting debris 20 into the flow channel 71. Behind

- 10 -

the shear cutter 9 in relation to the direction of rotary movement 5, is an axial cutter 10.

5 The shear cutter 9 has a shear cutter shank 14 made of a hard material, for which tungsten carbide is suitable. The rake surface facing the associated flow channel 71, is covered with a layer 15 of polycrystalline diamond. Such a shear cutter having a polycrystalline diamond cutting surface is known as a polycrystalline diamond compact cutter, or PDC cutter. In addition to the  
10 rake surface, the shear cutter is provided with a pre-cut flat impact surface 19 stretching essentially perpendicular to the central longitudinal axis of the drill bit and essentially parallel to the bottom hole surface of the earth formation 13.

15 The axial cutter 10 is formed of an axial cutter shank 16 which at least on one side is provided with a hemispherical or dome shaped cutting surface 17. The cutter is made of a hard material, for which tungsten carbide is a suitable material. Optionally, the cutter  
20 can be provided with a layer of polycrystalline diamond thus forming a PDC axial cutter.

In order to protect the shear cutter 9 from full exposure to the percussive impacts, they may be arranged recessed with respect to the axial cutters 10,11 such  
25 that the axial cutters 10,11 impact on the rock 13 in the bottom of the bore hole before the shear cutter 9 does. Ideally, the recessed arrangement causes the shear cutter 9 to be elevated above the rock 13 in the bottom of the bore hole, at a height corresponding to the amount  
30 of recess, when the axial cutters 10,11 just start to penetrate a fresh piece of rock 13. When the impact follows through, the final penetration depth of the shear cutter 9 is less than that of the axial cutters 10,11 by an amount corresponding to the amount of recess. Any  
35 amount of recess has a beneficial effect on the

- 11 -

operational lifetime of the shear cutters, but a recessed arrangement by at least 0.25 mm is recommended, while at least 0.50 mm is preferred.

5 In the examples shown in FIGs. 1a and 1b, FIGs. 2a and 2b, and FIG. 3, the outermost axial cutters 11 are PDC axial cutters and the other axial cutters 10 are tungsten carbide axial cutters. Thus, in these bit faces the outer most axial cutters 11 are harder and/or more wear resistant than the remaining axial cutters 10.

10 The shear cutters 9 are PDC cutters. FIG. 5 schematically shows the provision of the pre-cut flat impact surface 19 on these shear cutters for different pre-cutting depths of 1 mm, 2 mm and 3 mm. The pre-cutting depth corresponds to the normal distance between  
15 the pre-cut impact surface 19 and the summit point 18 where the shear cutter shank outer shell and the rake surface come together. The back-rake angle of each of these shear cutters is 40° as an example, but any angle smaller than 90° can be applied.

20 It can be seen that the pre-cut flat impact surface area increases as the pre-cutting depth increases. Preferably, the pre-cutting depth is between 1 and 3 mm.

In operation, the percussion drill bit is incorporated in a drilling system whereby the percussion  
25 drill bit is held by a drill string. The drilling system further comprises:

- first drive means for rotating the drill bit in the borehole so as to induce a scraping movement of the shear cutters along the borehole bottom; and
- 30 - second drive means for inducing a longitudinal reciprocal movement of the drill bit in the borehole so as to induce at least the axial cutters to exert a percussive force to the borehole bottom, which first and second drive means are both operated simultaneously. The  
35 second drive means are preferably formed by a hammer,

- 12 -

more preferably a reciprocative piston hammer. During a drilling operation, a drilling fluid is pumped through the drill string which is in fluid connection with the passages 8, 81, 82, 83. Suitable drilling fluids are mud, water, oil or foam, and can vary in dependence of the type of formation to be drilled.

As can best be seen in FIG. 4, the axial cutters 10,11 and the shear cutters 9 both are in contact with the earth formation 13, so that the percussive impact force is distributed over as many cutters as possible. Herewith the operational lifetime of the cutters is sustained as much as possible. In order to reduce the impact stress concentration acting on the shear cutters, the shear cutters are provided with a pre-cut impact surface as described above. These pre-cut impact surfaces, which can also be viewed upon as pre-cut wear flats, are also beneficial in reducing the tendency to excite so-called slip-stick torsional vibrations in the drilling system.

As a result of the axial percussive impacts, the formation 13 underneath the cutters crushes. As the bit rotates, the shear cutters 9 scrape along the bottom hole surface and build up rock flour and chips from the cutting debris and drilling fluid. The rock flour and chips are pushed in front of the shear cutters 9 where there is a flow channel 7 with flushing fluid running through it in an essentially radially outward direction. Herefrom the scraped cutting debris is flushed to the bore hole annulus and removed from the bottom hole area.

In order to further assist the flushing of cutting debris through the flow channels, the rake surface of each shear cutter can have a secondary inclination relative to the radial direction of the drill bit, the secondary inclination being such that the rake surface pushes drill

- 13 -

cuttings from the rock formation in radially outward or radially inward direction.

5 Typical suitable operating conditions for the drill bits described above, include a weight on bit lying in a range between 3 to 6 metric tons. The amount of percussive energy exercised on the drill bit per percussive blow can lie in a range of between 0.3 kJ to 5 kJ. Typically, the drilling system can be operated using between 10 and 50 kW of percussive power, at a  
10 percussion frequency between 9 and 30 Hz.

The percussion drill bits shown and described above have 6" and 8" outer diameters by way of example. It will be understood that other diameters can be applied in a similar fashion. Likewise, the invention is not limited  
15 by the number of blades shown. Any number of blades can be provided.

- 14 -

C L A I M S

1. A percussion drill bit for drilling into a subterranean earth formation, the drill bit having a central longitudinal axis and being operable by applying axial percussive motion along the axis and rotary motion about the axis, the drill bit comprising:
- 5       - a plurality of blades protruding from the drill bit;  
      - a plurality of flow channels stretching along the drill bit in a substantially radial direction whereby the successive flow channels are formed between two adjacent
- 10       blades;  
      - shear cutters which are provided in a row on or close to the leading edge of at least one of said blades with respect to the direction of rotary motion trailingly adjacent to the flow channel that is associated with it,
- 15       for running a fluid through and thereby removing cutting debris accumulating in front of the row of shear cutters; and in addition to these shear cutters;  
      - axial cutters which are located, with respect to the direction of rotary motion, in a trailing position with
- 20       respect to said row of shear cutters and its associated flow channel.
2. The percussion drill bit of claim 1, wherein the axial cutters are provided ahead of the subsequent neighbouring flow channel with respect to the direction
- 25       of rotary motion.
3. The percussion drill bit of claim 2, wherein the subsequent neighbouring flow channel is associated with a second row of shear cutters provided on the leading edge of the subsequent blade to the said at least one blade.



- 15 -


4. The percussion drill bit of claim 1, wherein the axial cutters are located on the same blade as the shear cutters.
5. The percussion drill bit of any one of the previous claims, wherein the axial cutters have dome shaped or essentially hemispherical shaped cutting surfaces.
6. The percussion drill bit of any one of the previous claims, wherein the axial cutters are formed essentially of tungsten carbide.
- 10 7. The percussion drill bit of claim 6, wherein the axial cutters are provided with an outer layer of polycrystalline carbon.
8. The percussion drill bit of any one of the previous claims, wherein there are more axial cutters provided than shearing cutters.
- 15 9. The percussion drill bit of any one of the previous claims, wherein the ratio between the number of axial cutters and the number of shearing cutters provided is at least 3:2.
- 20 10. The percussion drill bit of any one of the previous claims, wherein the shear cutters in a first said row of shear cutters are positioned at mutually different radial positions than the shear cutters in a second said row of shear cutters on another blade.
- 25 11. The percussion drill bit of any one of the previous claims, wherein the shear cutters have a rake surface facing the flow channel associated with it at a back-rake angle of less than 90° wherein the back-rake angle is defined as the included angle between the projection of a line perpendicular to said rake surface on a plane
- 30 defined by said central longitudinal axis of the drill bit and the tangential direction of rotary motion, and a plane perpendicular to said longitudinal axis.
12. The percussion drill bit of any one of the previous claims, wherein one or more of the shear cutters is
- 35

- 16 -

provided with a pre-cut flat impact surface essentially parallel to the plane perpendicular to the central longitudinal axis.


- 5 13. Drilling system for drilling a borehole in an earth formation, comprising a drill string provided with a percussion drill bit in accordance with any one of the previous claims, the drilling system further comprising:
- first drive means for rotating the drill bit in the borehole so as to induce a scraping movement of the shear
  - 10 cutters along the borehole bottom; and
  - second drive means for inducing a longitudinal reciprocal movement of the drill bit in the borehole so as to induce at least the axial cutters to exert a percussive force to the borehole bottom.
- 15 14. Method of drilling a bore hole into a subterranean earth formation, comprising the steps of providing a drilling system in accordance with claim 13, placing the drill bit against the subterranean earth formation that is to be drilled, exercising a rotary motion about the
- 20 axis while maintaining a force on the drill bit against the earth formation in the axial direction, and intermittently providing percussive strikes on the drill bit.

1/4

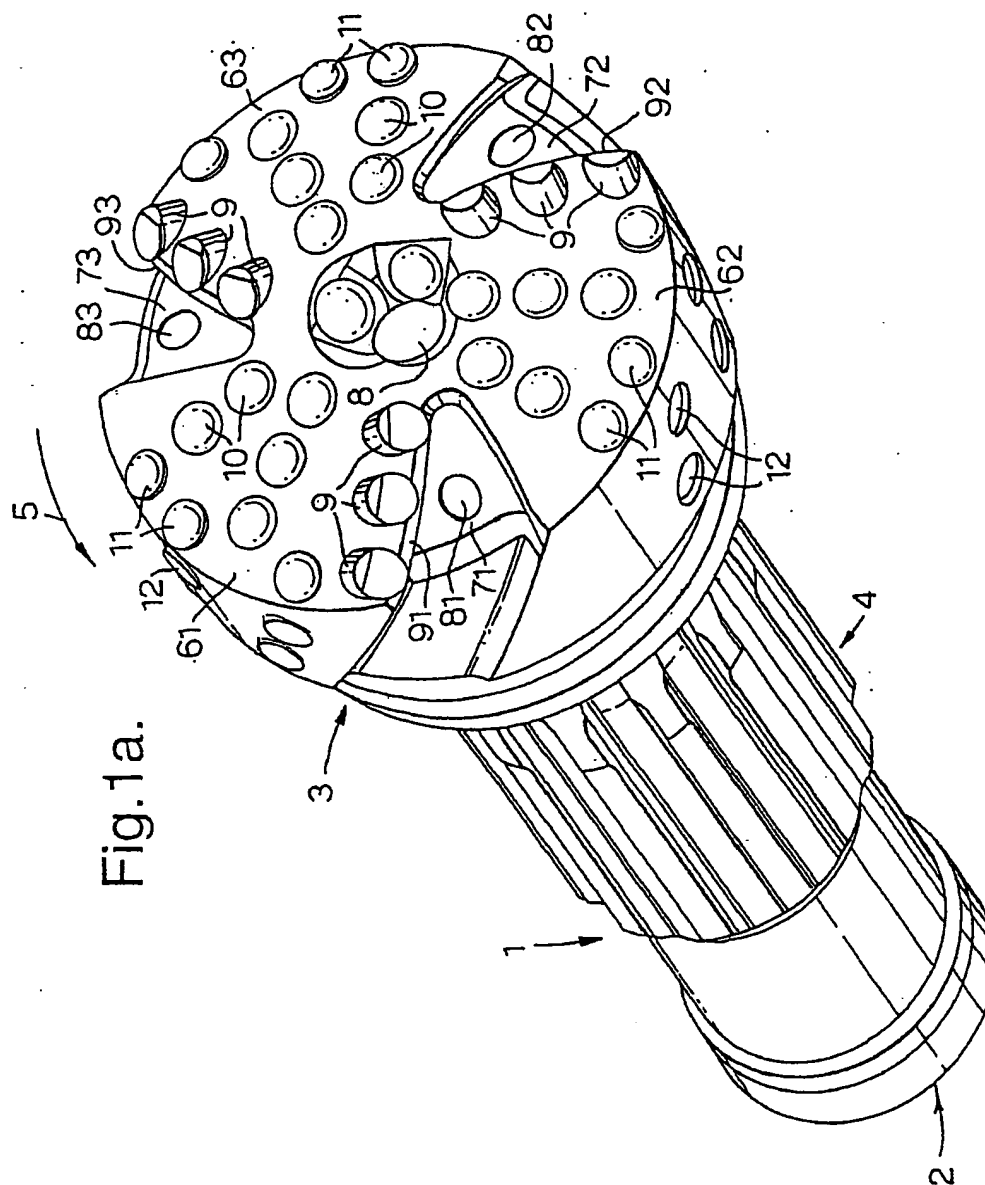

2/4

Fig.1b.

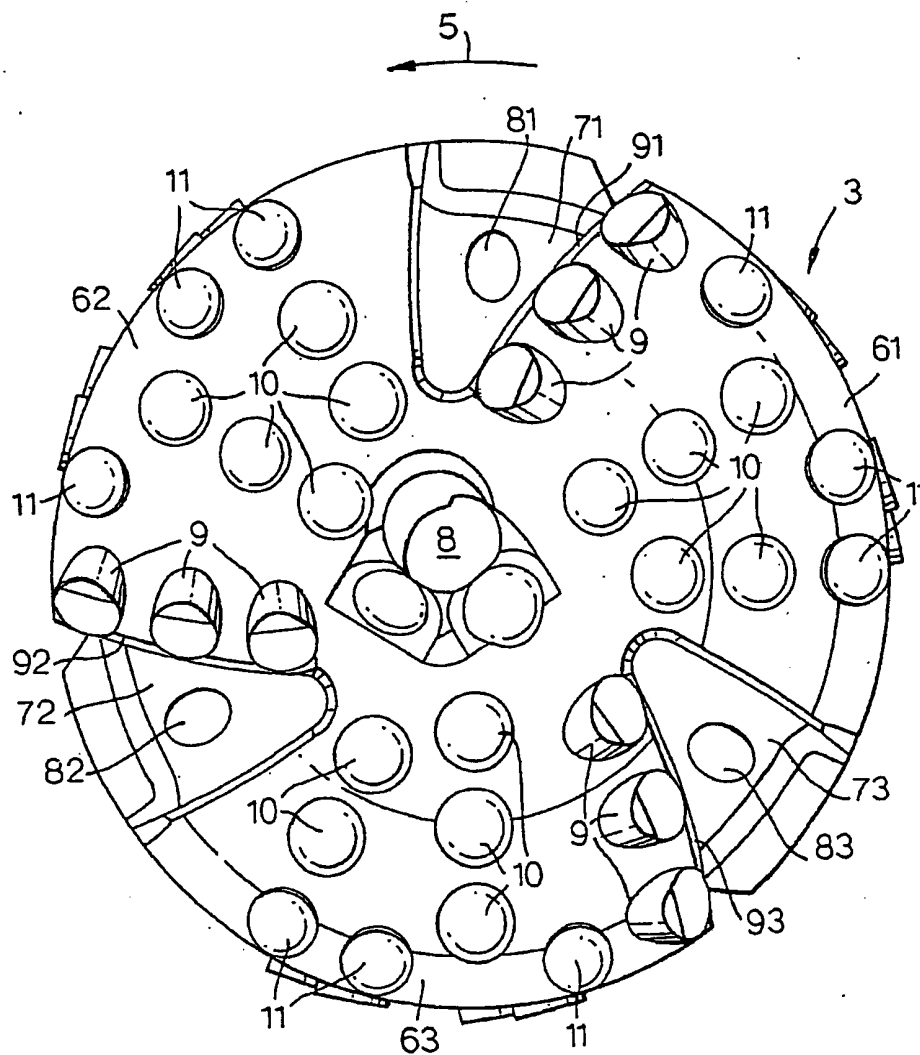

3/4

Fig.2a.


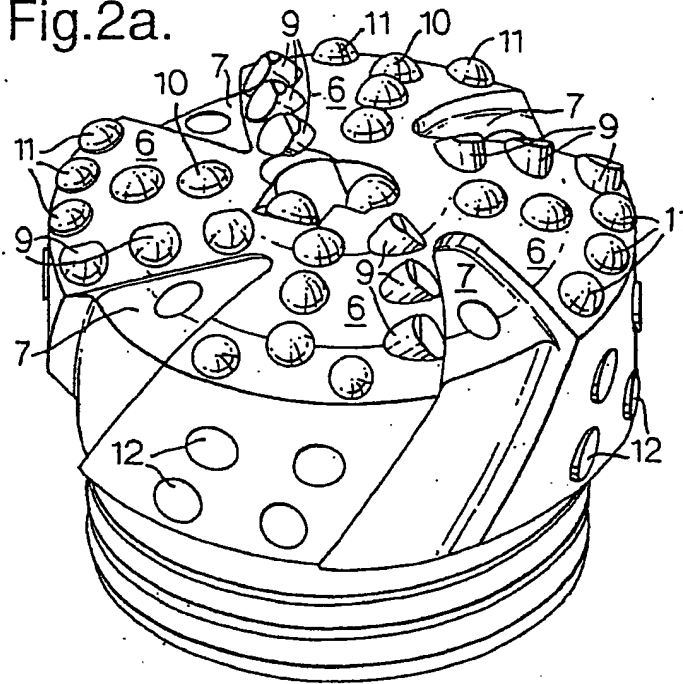


Fig.2b.

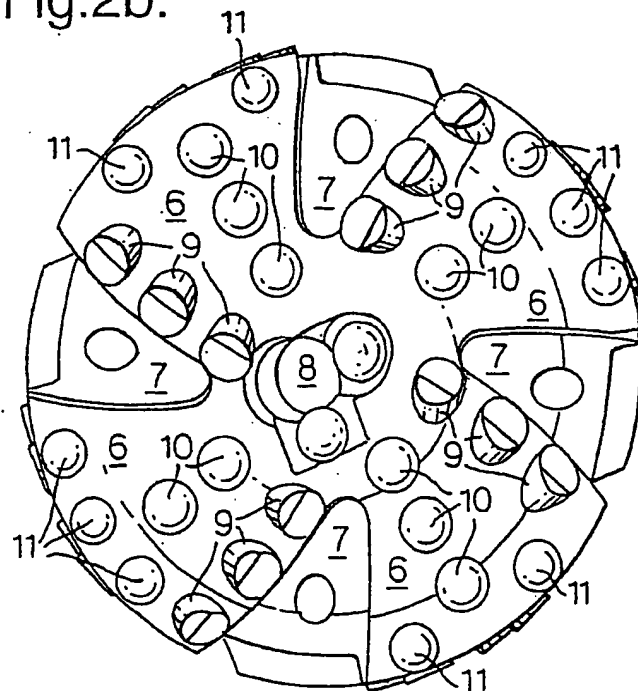

4/4

Fig.3.

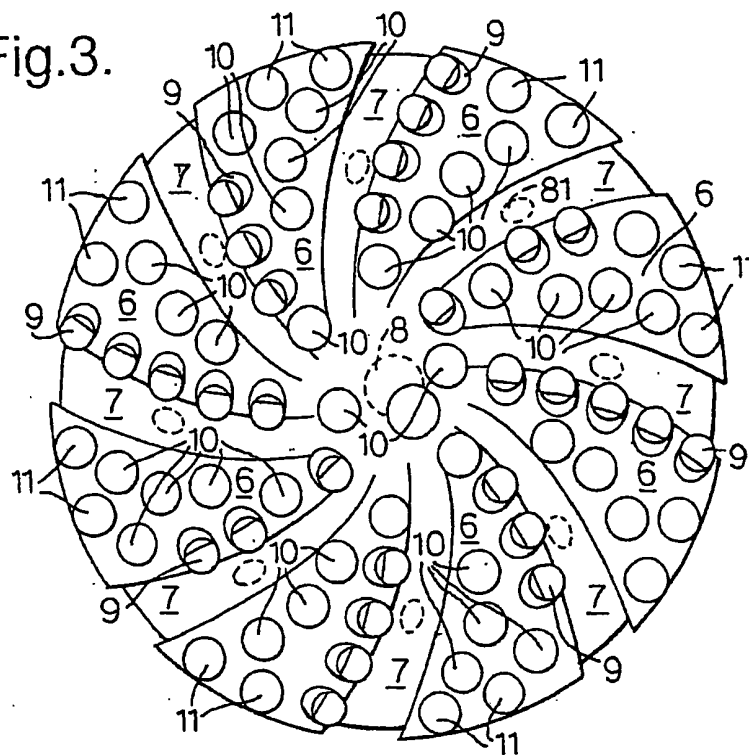


Fig.4.


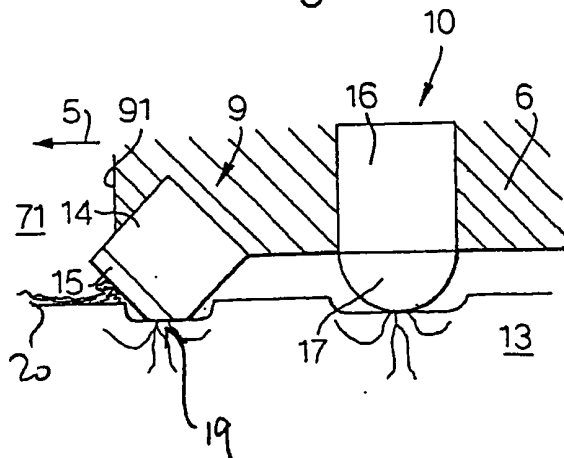


Fig.5.

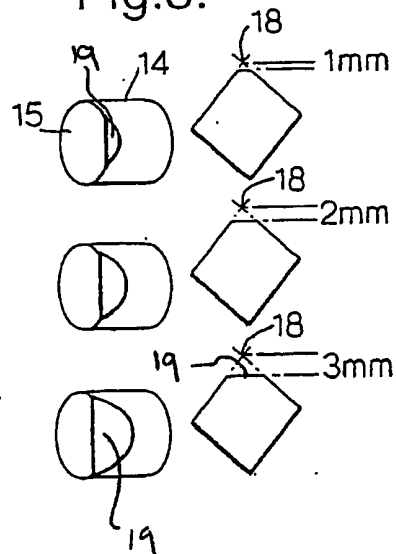

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP2004/050912

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 E21B10/36 E21B10/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 253 864 B1 (HALL DAVID R) 3 July 2001 (2001-07-03) cited in the application the whole document	1
A	US 5 025 875 A (WITT LEWIS) 25 June 1991 (1991-06-25) figure 1	1
A	US 6 290 002 B1 (FEHR JAMES ET AL) 18 September 2001 (2001-09-18) column 4, line 54 -column 5, line 59	1
A	EP 0 563 561 A (BOART HWF GMBH CO KG) 6 October 1993 (1993-10-06) figure 1	1
-/-		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

30 August 2004

Date of mailing of the international search report

07/09/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3018

Authorized officer

Morrish, S

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP2004/050912

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 03/042492 A (MOIR FREDRIC GRAHAM ;TERLET CHRISTOPHER JOHN (AU); DEBARRO ANTHONY) 22 May 2003 (2003-05-22) figure 5  —————	1



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2004/050912

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6253864	B1	03-07-2001	NONE
US 5025875	A	25-06-1991	AU 630292 B2 22-10-1992 AU 7605991 A 07-11-1991 CA 2041254 A1 08-11-1991 ZA 9103237 A 29-04-1992
US 6290002	B1	18-09-2001	CA 2260612 A1 03-08-2000
EP 0563561	A	06-10-1993	DE 4211048 C1 06-05-1993 DE 59306230 D1 28-05-1997 EP 0563561 A1 06-10-1993 JP 6010582 A 18-01-1994
WO 03042492	A	22-05-2003	WO 03042492 A1 22-05-2003 CA 2466939 A1 22-05-2003

**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**